



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

February 3, 2021

Jane Miller
Earth Science Laboratories, Inc.
c/o Biologic Regulatory Consulting, Inc.
10529 Heritage Bay Blvd.
Naples, FL 34120

Subject: Label Amendment – Multiple Changes Including Additional ABNs
Product Name: EarthTec
EPA Registration Number: 64962-1
Application Date: 01/28/2019
Decision Number: 547903

Dear Jane:

The amended label referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. This approval does not affect any conditions that were previously imposed on this registration. You continue to be subject to existing conditions on your registration and any deadlines connected with them.

A stamped copy of your labeling is enclosed for your records. This labeling supersedes all previously accepted labeling. You must submit one copy of the final printed labeling before you release the product for shipment with the new labeling. In accordance with 40 CFR 152.130(c), you may distribute or sell this product under the previously approved labeling for 18 months from the date of this letter. After 18 months, you may only distribute or sell this product if it bears this new revised labeling or subsequently approved labeling. "To distribute or sell" is defined under FIFRA section 2(gg) and its implementing regulation at 40 CFR 152.3.

Should you wish to add/retain a reference to the company's website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product's label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA's Office of Enforcement and Compliance.

Your release for shipment of the product constitutes acceptance of these conditions. If these conditions are not complied with, the registration will be subject to cancellation in accordance

Page 2 of 2
EPA Reg. No. 64962-1
Decision No. 547903

with FIFRA section 6. If you have any questions, please contact David Drawbaugh by phone at 703-731-8818, or via email at Drawbaugh.David@epa.gov.

Sincerely,

A handwritten signature in black ink, appearing to read 'Kable Bo Davis', enclosed within a hand-drawn oval.

Kable Bo Davis
Senior Regulatory Specialist
Registration Division (7505P)
Office of Pesticide Programs

Enclosure

[Note to Reviewer: Bracketed language and graphics are optional]

COPPER **GROUP** **Not Classified** **HERBICIDE**

EARTHTEC

[A B N : EarthTec QZ; EarthTec QZ-P; CopCheck; Agritec; AgriTec 2]

[Algaecide/Nonpublic Health Bactericide/][Molluscicide]

[For Use in Impounded Waters; Lakes; Ponds; Lagoons; Wastewater Lagoons; Reservoirs; Livestock Watering Systems; Potable Water Supplies; Sedimentation Basins; Ornamental Water Features or Fountains; and Equipment/Structures that deliver water directly to publicly owned water treatment facilities to include pipes, intake structures, gatehouses, screens, pumping stations, weirs, tanks, and penstocks.]*

[For Use in Irrigation Conveyance Systems, Irrigation Reservoirs, Irrigation Canals, Ditches, and Chemigation Systems]

[For Control of Algae, Nonpublic Health Bacteria, Aquatic Weeds, Mollusks, Leeches and Snails]

[For Use In Retention and Golf Course Ponds, Aquaculture Ponds, Biological Fishponds or Systems, Irrigation and Chemigation Systems, Ornamental Water Features and Fountains.]

[To Control Algae and Tadpole Shrimp in Rice Fields]

[For Use in Aquaculture Ponds]

[For Use in Feedlot Run-Off Lagoons, Animal Waste or Confinement Pits and Organic Sludge Pits]

[For Suppression of Bacterial Odors and Toxic Gases in Sewage Lagoons, Feedlot Runoff Pits, Animal Confinement Facilities, and Organic Sludge Pits] [containing organic matter of algae/nonpublic health bacteria.]

[Molluscicide] [For Control of] [Mollusk Pests including] [Quagga and Zebra Mussels] [in Impounded Waters, Lakes, Ponds, Lagoons, Wastewater Lagoons, Reservoirs, Potable Water Supplies, Canals, Ditches, Aqueducts, and Equipment/Structures that deliver water directly to publicly owned water treatment facilities to include pipes, intake structures, gatehouses, screens, pumping stations, weirs, tanks, and penstocks.]*

[For Control of [Leeches,] [Slugs,] [and] [Snails] in Impounded Waters, Lakes, Ponds, Livestock Watering Systems, Reservoirs, Swimming Areas, Farm, Industrial, Retention and Golf Course Ponds, Aquaculture Ponds, Biological Fishponds or Systems, Irrigation and Chemigation Systems, Ornamental Water Features and Fountains.]

*Water Destined to Be Used as Drinking Water - this water must receive additional and separate potable water treatment.

ACTIVE INGREDIENT

Copper Sulfate Pentahydrate**(CAS No. 7758-99-8)..... 19.8%

OTHER INGREDIENTS..... 80.2%

Total..... 100.0%

**Metallic Copper: 5%

This product weighs 9.91 lbs. per gallon (1.188 kg/L) and contains 0.493 lbs. elemental copper per gallon.

KEEP OUT OF REACH OF CHILDREN WARNING/AVISO


If you do not understand this label, find someone to explain it to you in detail. (Si usted no entiende la etiqueta, busque a alguien para que se la explique a usted en detalle.)

[See [side] [back] [panel] [label booklet] for [complete] [additional] [First Aid,] [Precautionary Statements,] [Directions For Use,] and [Storage and Disposal.]

Manufactured [MFG.] By:
Earth Science Laboratories, Inc.
Rogers, AR 72756
Phone: XXX-XXX-XXXX

EPA Reg. No.: 64962-1
EPA Est. No.: XXXXX-XX-XXX
BATCH NO.:

NET CONTENTS: _____ [fl. oz.][Gallons]

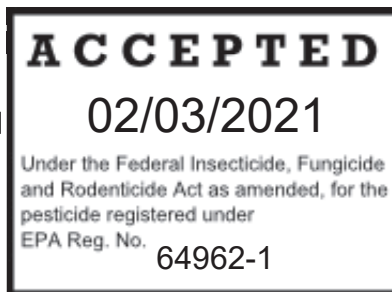

[Note to Reviewer: Bracketed language and graphics are optional]

FIRST AID	
IF IN EYES:	Hold eye open and rinse slowly and gently with water for 15 to 20 minutes. Remove contact lenses if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.
IF SWALLOWED:	Call a poison control center or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give anything by mouth to an unconscious person.
IF ON SKIN OR CLOTHING:	Take off contaminated clothing. Rinse skin immediately with plenty of water for 15 to 20 minutes. Call a poison control center or doctor for treatment advice.
Note to Physician: Probable mucosal damage may contraindicate the use of gastric lavage.	
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact INFOTRAC 1-800-535-5053 for emergency medical treatment.	

PRECAUTIONARY STATEMENTS
Hazards to Humans and Domestic Animals
WARNING

Causes substantial but temporary eye injury. Harmful if swallowed. Harmful if absorbed through skin. Do not get in eyes or on clothing. Avoid contact with skin. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash clothing before reuse.

Personal Protective Equipment (PPE)

Mixers, loaders, applicators, and other handlers must wear the following:

- Long-sleeved shirt and long pants
- Shoes plus socks
- Chemical-resistant gloves made of any waterproof material such as polyvinyl chloride \geq 14 mls, polyethylene or Viton \geq 14 mls
- Protective eyewear (goggles, face shield, or safety glasses)

User Safety Requirements

Follow manufacturer's instructions for cleaning/maintaining PPE. If no such instructions for washables exist, use detergent and hot water. Keep and wash PPE separately from other laundry. Discard clothing and other absorbent material that have been drenched or heavily contaminated with the product's concentrate. Do not reuse them.

ENGINEERING CONTROLS

Pilots must use an enclosed cab that meets the definition listed in the Worker Protection Standard (WPS) for agricultural pesticides [40 CFR 170.305].

[Note to Reviewer: Bracketed language and graphics are optional]

USER SAFETY RECOMMENDATIONS

Users should:

- Wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet.
- Remove clothing/PPE immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing.
- Remove PPE immediately after handling this product. As soon as possible, wash thoroughly and change into clean clothing.
- Wash the outside of gloves before removing

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and aquatic invertebrates. Waters treated with this product may be hazardous to aquatic organisms.

Fish Advisory Statement: This copper product is toxic to fish and aquatic organisms. Unlike most organic pesticides, copper is an element and will not break down in the environment and will therefore accumulate in sediment with repeated applications. Copper is a micronutrient, but its pesticidal application rate exceeds the amount of copper needed as a nutrient.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

Do not apply this product in a way that will contact workers or other persons, either directly or through drift. Only protected handlers may be in the area during application. For any requirement specific to your state and tribe, consult the agency responsible for pesticide regulation.

AGRICULTURAL USE REQUIREMENTS

Use this product only in accordance with its labeling and the Worker Protection Standard, 40 CFR part 170. This standard contains requirements for the protection of agricultural workers on farms, forests, and nurseries, and mixers, loaders, applicators, and other handlers of agricultural pesticides. It contains requirements for training, decontamination, notification, and emergency assistance. It also contains specific instructions and exceptions pertaining to the statements on the label about personal protective equipment (PPE), restricted re-entry interval, and notification to workers.

Do not enter or allow worker entry into treated areas during the restricted entry interval of 48 hours.

PPE required for early entry to treated areas that is permitted under the Worker Protection Standard and that involves contact with anything that has been treated, such as soil or water is: coveralls, protective eyewear, chemical resistant gloves (i.e., gloves made of any waterproof material) and shoes plus socks.

[Note to Reviewer: Bracketed language and graphics are optional]

NON-AGRICULTURAL USE REQUIREMENTS

The requirements in this box apply to uses of this product that are not within the scope of the Worker Protection Standard for agricultural pesticides 40 CFR part 170. The WPS applies when this product is used to produce plants on farms, forests, nurseries, or greenhouses.

Do not allow re-entry into treated areas until sprays have dried.

RESISTANCE MANAGEMENT

BACTERICIDE USE

For resistance management, EarthTec contains a Group (Not Classified) bactericide. Any bacterial population may contain individuals naturally resistant to EarthTec and other Group (Not Classified) bactericides. A gradual or total loss of pest control may occur over time if these fungicides/bactericides are used repeatedly in the same fields. Appropriate resistance-management strategies should be followed.

To delay bactericide resistance, take one or more of the following steps:

- Rotate the use of EarthTec or other Group (Not Classified) bactericides within a growing season sequence with different groups that control the same pathogens.
- Use tank mixtures with bactericides from a different group that are equally effective on the target pest when such use is permitted. Use at least the minimum application rate as labeled by the manufacturer.
- Adopt an integrated disease management program for bactericide use that includes scouting, uses historical information related to pesticide use, and crop rotation, and which considers host plant resistance, impact of environmental conditions on disease development, disease thresholds, as well as cultural, biological, and other chemical control practices.
- Where possible, make use of predictive disease models to effectively time bactericide applications. Note that using predictive models alone is not sufficient to manage resistance.
- Monitor treated bacterial populations for resistance development.
- Contact your local extension specialist or certified crop advisor for any additional pesticide resistance-management and/or 1PM recommendations for specific crops and pathogens.
- For further information or to report suspected resistance contact Earth Science Laboratories, Inc. at 800-257-9283. You can also contact your pesticide distributor or university extension specialist to report resistance.

AQUATIC USE

Water bodies or management units should be scouted prior to application to identify the weed species present and their growth stage to determine if the intended application will be effective. Water bodies or management units should be scouted after application to verify that the treatment was effective.

Suspected herbicide-resistant weeds may be identified by these indicators:

- Failure to control a weed species normally controlled by the herbicide at the dose applied, especially if control is achieved on adjacent weeds;
- A spreading patch of non-controlled plants of a particular weed species; and
- Surviving plants mixed with controlled individuals of the same species.

Report any incidence of non-performance of this product against a particular weed species to Earth Science Laboratories, Inc., their representative or call 800-257-9283. If resistance is suspected, treat weed escapes with an herbicide having a different mechanism of action and/or use non-chemical means to remove escapes, as practical, with the goal of preventing further reproduction.

[Note to Reviewer: Bracketed language and graphics are optional]

Implement the Early Detection, Rapid Response practice and Maintenance Control by using the following practices where possible:

- Identify weeds present in a management unit through scouting or history of the water body and understand the biology of target species.
- Applications should target weeds when populations are small and there is low biomass, early in the season to maximize efficacy.
- Applications should be made so that the herbicide contacts the weed. Use the appropriate application method for the use site/weed/chemical combination.
- Weed escapes should not be allowed to go to seed or produce asexual vegetative propagules.
- Use a diversified approach toward weed management. Whenever possible incorporate multiple weed-control practices such as mechanical control, biological management practices, and rotation of MOAs.
- Time applications to have the highest probability for control and minimize need for follow-up control measures. Apply during conditions that minimize herbicide degradation (light/temperature/microbes) and/or dissipation (water exchange).

Contact your local sales representative, local water management agency, or extension agent to find out if suspected resistant weeds to this MOA have been found in your region. If resistant biotypes of target weeds have been reported, use the application rates of this product specified for your local conditions. Tank mix products so that there are multiple effective mechanisms of actions for each target weed.

SPRAY DRIFT

Aerial Applications:

- Do not release spray at a height greater than 10 ft. above the vegetative canopy or water, unless a greater application height is necessary for pilot safety.
- Applicators are required to use a medium or coarser droplet size (ASABE S572.1).
- Do not apply when wind speed exceeds 15 mph at the application site. If the windspeed is greater than 10 mph, the boom length must be 65% or less of the wingspan for fixed wing aircraft and 75% or less of the rotor diameter for helicopters. Otherwise, the boom length must be 75% or less of the wingspan for fixed-wing aircraft and 90% or less of the rotor diameter for helicopters.
- Applicators must use ½ swath displacement upwind at the downwind edge of the application area.
- Do not apply during temperature inversions.

Ground Boom Application:

- Apply with the spray release height recommended by the manufacturer, but no more than 4 feet above the ground or crop canopy.
- Applicators are required to use a medium or coarser droplet size (ASABE S572.1).
- Do not apply when wind speeds exceed 15 miles per hour at the application site.
- Do not apply during temperature inversions.

SPRAY DRIFT ADVISORIES

THE APPLICATOR IS RESPONSIBLE FOR AVOIDING OFF-SITE SPRAY DRIFT. BE AWARE OF NEARBY NON-TARGET SITES AND ENVIRONMENTAL CONDITIONS.

IMPORTANCE OF DROPLET SIZE

An effective way to reduce spray drift is to apply large droplets. Use the largest droplets that provide target pest control. While applying larger droplets will reduce spray drift, the potential for drift will be greater if applications are made improperly or under unfavorable environmental conditions.

[Note to Reviewer: Bracketed language and graphics are optional]

Controlling Droplet Size – Ground Boom

- Volume - Increasing the spray volume so that larger droplets are produced will reduce spray drift. Use the highest practical spray volume for the application. If a greater spray volume is needed, consider using a nozzle with a higher flow rate.
- Pressure - Use the lowest spray pressure recommended for the nozzle to produce the target spray volume and droplet size.
- Spray Nozzle - Use a spray nozzle that is designed for the intended application. Consider using nozzles designed to reduce drift.

Controlling Droplet Size – Aircraft

- **Adjust Nozzles** - Follow nozzle manufacturers recommendations for setting up nozzles. Generally, to reduce fine droplets, nozzles should be oriented parallel with the airflow in flight.

BOOM HEIGHT – Ground Boom

Use the lowest boom height that is compatible with the spray nozzles that will provide uniform coverage. For ground equipment, the boom should remain level with the crop and have minimal bounce.

RELEASE HEIGHT - Aircraft

Higher release heights increase the potential for spray drift. When applying aurally to crops, do not release spray at a height greater than 10 ft. above the crop canopy, unless a greater application height is necessary for pilot safety.

SHIELDED SPRAYERS

Shielding the boom or individual nozzles can reduce spray drift. Consider using shielded sprayers. Verify that the shields are not interfering with the uniform deposition of the spray on the target area.

TEMPERATURE AND HUMIDITY

When making applications in hot and dry conditions, use larger droplets to reduce effects of evaporation.

TEMPERATURE INVERSIONS

Drift potential is high during a temperature inversion. Temperature inversions are characterized by increasing temperature with altitude and are common on nights with limited cloud cover and light to no wind. The presence of an inversion can be indicated by ground fog or by the movement of smoke from a ground source or an aircraft smoke generator. Smoke that layers and moves laterally in a concentrated cloud (under low wind conditions) indicates an inversion, while smoke that moves upward and rapidly dissipates indicates good vertical air mixing. Avoid applications during temperature inversions.

WIND

Drift potential generally increases with wind speed. AVOID APPLICATIONS DURING GUSTY WIND CONDITIONS.

Applicators need to be familiar with local wind patterns and terrain that could affect spray drift.

AQUATIC USE PRECAUTION

(excluding fountains and aquatic agriculture)

Waters treated with this product may be hazardous to aquatic organisms. Treatment of aquatic weeds and algae can result in oxygen loss from decomposition of dead biomass. This oxygen loss can cause fish and invertebrate suffocation. To minimize this hazard, do not treat more than ½ of the water body and wait at least 14 days between treatments to avoid depletion of oxygen due to decaying vegetation (excluding water infrastructure and constructed conveyances such as drainage and irrigation canals, ditches and pipelines and aqueducts for drinking water or irrigation use). Begin treatment along the shore

[Note to Reviewer: Bracketed language and graphics are optional]

and proceed outward in bands to allow fish to move into untreated areas. Consult with the state or local agency with primary responsibility for regulating pesticides before applying to public waters to determine if a permit is required.

Application of algaecides to high density blooms of cyanobacteria can result in the release of intracellular contents into the water. Some of these intracellular compounds are known mammalian hepato- and nervous system toxins. Therefore, to minimize the risk of toxin leakage, manage cyanobacteria effectively in order to avoid applying this product when blooms of toxin-producing cyanobacteria are present at high density. In situations where rapidly reproducing toxic algal species pose a public health threat to drinking or recreational water resources, applicators must receive authorization from applicable state, local or tribal water resources authorities to apply copper at intervals shorter than 14 days should the circumstance demand.

Certain water conditions including low pH (≤ 6.5), low dissolved organic carbon (DOC) levels (3.0 mg/L or lower) and "soft" waters (i.e., alkalinity less than 50 mg/L) increases the potential acute toxicity to non-target aquatic organisms. The application rates on this label are appropriate for water with pH values > 6.5 , DOC levels > 3.0 mg/L, and alkalinity greater than 50 mg/L. Avoid treating waters with pH values < 6.5 , DOC levels < 3.0 , and alkalinity less than 50 ppm (e.g., soft or acid waters), as trout and other sensitive species of fish may be killed under such conditions if present.

Consult your state department of natural resources or fish and game agency before applying this product to public waters. Permits may be required before treating such waters.

APPLICATION AND HANDLING EQUIPMENT

Application, handling, or storage equipment MUST consist of fiberglass, PVC, polypropylene, Viton, corrosion resistant plastics or stainless steel. Never use mild steel, nylon, brass, or copper around EarthTec. Always rinse and clean equipment thoroughly each night with plenty of fresh, clean water.

PRODUCT INFORMATION

[EarthTec is for use in Impounded Waters; Lakes; Ponds; Lagoons; Wastewater Lagoons; Reservoirs; Livestock Watering Systems; Potable Water Supplies*; Sedimentation Basins; Ornamental Water Features or Fountains; and Equipment/Structures that deliver water directly to publicly owned water treatment facilities to include pipes, intake structures, gatehouses, screens, pumping stations, weirs, tanks, and penstocks that deliver water directly to publicly owned water treatment facilities.]

[For Use in Irrigation Conveyance Systems, Irrigation Reservoirs, Irrigation Canals, Ditches, and Chemigation Systems]

[EarthTec is an algaecide, nonpublic health bactericide and molluscicide consisting of a soluble formulation of copper.] [EarthTec's proprietary formulation ensures that the active ingredient – metallic copper – is delivered in the form of the biologically available cupric ion, Cu^{++} . [EarthTec is soluble and will quickly disperse.]

[Note to Reviewer: Bracketed language and graphics are optional]

[EarthTec has diffusional properties that move the ions through the water according to physical conditions. The product will stay soluble in the water until the ions are taken up by the algae or nonpublic health bacteria, or affected by physical properties.]

[EarthTec is for use to control algae and to suppress nonpublic health bacteria, and bacteria that cause taste and odor problems in impounded waters, lakes, ponds, aquaculture ponds, lagoons, wastewater lagoons, reservoirs, livestock watering systems, potable water supplies*, sedimentation basins, ornamental water features or fountains, and equipment/structures that deliver water directly to publicly owned water treatment facilities to include pipes, intake structures, gatehouses, screens, pumping stations, weirs, tanks, and penstocks.]

[EarthTec is used to control algae, nonpublic health bacteria, aquatic weeds, mollusks,] [leeches, slugs, and snails in irrigation reservoirs, lakes, swimming areas, farm, industrial, retention and golf course ponds, ornamental water features or fountains, aquaculture ponds, livestock watering systems, biological fishponds or systems, irrigation and chemigation systems, and waters destined for use as drinking water.]

[EarthTec is used for the suppression of bacterial odors and toxic gases in sewage lagoons, feedlot runoff pits, animal confinement facilities, and organic sludge pits containing organic matter of algae/nonpublic health bacteria.]

[EarthTec is for use to control algae and to suppress nonpublic health bacteria in irrigation conveyance systems, irrigation reservoirs, irrigation canals, ditches, and chemigation systems.]

[EarthTec is for use to control algae in Swimming Areas, Farm, Industrial, Retention and Golf Course Ponds, Aquaculture Ponds, Biological Fishponds or Systems, Irrigation and Chemigation Systems]

[EarthTec is for use to control algae and tadpole shrimp in rice fields.]

[EarthTec is for use to control algae and to suppress nonpublic health bacteria and bacteria that cause odor problems in aquacultural ponds.]

[EarthTec is for use to suppress nonpublic health bacteria and bacteria that cause odors (such as odors from hydrogen sulfide and ammonia gas) in feedlot run-off lagoons, animal waste or confinement pits and organic sludge pits.]

[EarthTec is for use to control mollusks including Quagga and Zebra mussels in impounded waters, lakes, ponds, lagoons, wastewater lagoons, reservoirs, potable water supplies*, canals, ditches, aqueducts, and equipment/structures that deliver water directly to publicly owned water treatment facilities to include pipes, intake structures, gatehouses, screens, pumping stations, weirs, tanks, and penstocks].

[EarthTec is for use to control leeches, slugs, and snails in impounded waters, lakes, ponds, livestock watering systems, reservoirs, swimming areas, farm, industrial, retention and golf course ponds, aquaculture ponds, biological fishponds or systems, irrigation and chemigation systems, ornamental water features and fountains.]

[*Water Destined to Be Used as Drinking Water (this water must receive additional and separate potable water treatment)]

[Note to Reviewer: Bracketed language and graphics are optional]

APPLICATION INSTRUCTIONS

EarthTec may be applied throughout the year. For algae control, apply in the late spring or early summer when algae first appear. Apply based on the volume of water to be treated. The dose rates are variable and depend upon algae species, amount of algae present, water hardness, water temperature, turbidity, and flows. Preferably, the water should be clear with temperature above 60 degrees F (15.6 degrees C). Higher doses may be required for lower water temperatures, higher algae concentrations, and for hard waters. See **Specific Directions for Use** section.

Apply EarthTec through metering pump, subsurface hoses or from a properly equipped moving boat into the body of water. For best results disperse EarthTec evenly throughout the body of water on a sunny day when algae are near the surface. EarthTec is soluble and will quickly disperse.

When treating flowing waters, use a metering pump or similar means to apply a continuous dose so as to achieve a final dilution within the recommended range. See **Specific Directions for Use**.

EarthTec may be poured directly into ponds, small lakes, and reservoirs 3 acres or less in area. For larger bodies of water, of 3 acres or more, apply EarthTec at several points in the ponds, lakes, or reservoirs. Larger bodies of water may be treated with EarthTec by dragging a feeder hose behind a boat across the body of water or dispensing via conventional spray equipment mounted to a boat, helicopter, or airplane.

EarthTec will quickly diffuse throughout the water body in several hours; broad distribution of the product will speed dispersal and provide quicker control of algae. EarthTec may be applied to irrigation systems by a drip system or feeder pump according to the flow volume.

In regions where ponds freeze in winter, treatment should be done 6 to 8 weeks before expected freeze to prevent masses of decaying algae under an ice cover. Before treating bodies of water, consult proper state authorities such as the fisheries commission or conservation department to obtain any necessary permits.

Pre-Application Dose Determination

For algae and aquatic plant treatments, applicators should conduct initial dose determination tests simulating a full-scale treatment program to determine the minimum efficacious concentrations for eliminating the target species, unless an effective dose is already known for the given target pest population.

USE RATES

Direct Applications to Whole Water Bodies

Apply 0.33 to 1.3 gallons EarthTec (0.06 to 0.24 ppm metallic copper) [1 to 4 gallons EarthTec per million gallons water] per acre-foot per application. Increase as necessary to achieve control but do not exceed 5.5 gallons EarthTec (2.74 lbs. metallic copper) per acre-foot (1.0 ppm metallic copper) [16.7 ppm EarthTec] in the treated water. If algae are present, use the higher labeled rate. Do not apply to more than one-half of the water body at a time. Stagger treatments at 14-day intervals. See **Specific Directions for Use** section for additional treatment instructions.

Restrictions:

- Do not apply more than 5.5 gallons EarthTec (2.74 lbs. metallic copper) per acre-foot (1.0 ppm metallic copper) [16.7 ppm EarthTec] per application.
- Do not apply more than 44.5 gallons EarthTec (21.9 lbs. metallic copper) per acre-foot per year (8

[Note to Reviewer: Bracketed language and graphics are optional]

applications per year at up to 1 ppm). This rate/frequency is calculated based on staggering the treatment of each half of the water body every 14 days (at a rate of 2.74 lbs. metallic copper per acre-foot = 1 ppm) for eight months (244 days).

Direct Application to Sections of a Waterbody [(Water Management Units)]

Apply 0.33 to 1.3 gallons EarthTec (0.06 to 0.24 ppm metallic copper) per acre-foot per application. Increase as necessary to achieve control but do not exceed 5.5 gallons EarthTec (2.74 lbs. metallic copper) per acre-foot (1 . 0 ppm metallic copper) [16.7 ppm EarthTec] in the treated water. Applicators must wait at least 14 days before beginning retreatment. See **Specific Directions for Use** section for additional treatment instructions.

Restrictions:

- Do not apply more than 5.5 gallons EarthTec (2.74 lbs. metallic copper) per acre-foot (1.0 ppm metallic copper) [16.7 ppm EarthTec] per application.
- Do not apply more than 94 gallons EarthTec (46.6 lbs. metallic copper) per acre-foot (16.7 ppm metallic copper) per year (17 applications per year at up to 1 ppm). This rate/frequency is calculated based on the maximum number of possible applications allowed based on a 14-day minimum (at a rate of 2.74 lbs. metallic copper per acre-foot = 1 ppm) retreatment interval for eight months (244 days). Do not apply more than 46.6 lbs. of metallic copper to a water management unit, regardless of the pest(s) targeted by applications.

Note: In situations where rapidly reproducing toxic algal species pose a public health threat to drinking or recreational water resources, applicators must receive authorization from applicable state, local or tribal water resources authorities to apply copper in excess of 46.6 lbs. of metallic copper per acre-foot per year for a single water management unit.

Gallons of EarthTec and Water		
Gallons EarthTec	Gallons Water	Metallic Copper (ppm)
0.1 (0.4 quart or 0.8 pint)	6,000	1.0
0.25 (1 quart)	15,000	1.0
1	60,000	1.0
1.66	100,000	1.0
2.50	150,000	1.0
3.33	200,000	1.0
8.33	500,000	1.0
16.66	1,000,000	1.0

Example: To achieve 1.0 ppm of metallic copper, 1 gallon of EarthTec added to 60,000 gallons of water is equal to 1.0 ppm metallic copper. In order to attain 1.0 ppm of metallic copper in the treated water, the amount of EarthTec added to a water body is equal to the gallons of water being treated divided by 60,000 multiplied by 1 (see above). Use volumetric measurement devices that are calibrated in accordance with manufacturer specifications.

Use the following formulas for calculating water volume and flow rates:

- To calculate the volume of water, multiply the average depth by surface area. One acre foot equals 326,000 gallons.
- To calculate the gallons of water, multiply the volume in cubic feet times 7.5. One cubic foot per second of flow equals 27,000 gallons/hour.

[Note to Reviewer: Bracketed language and graphics are optional]

See **Specific Directions for Use** section for additional treatment instructions.

Use higher dosages for Chara, Nitella and filamentous algae, and lower dosages for planktonic algae. If there is uncertainty about the dosage begin with the lower dosage and increase until control is achieved or until the maximum allowable level has been reached. See **Specific Directions for Use** . For use in controlling algae and cyanobacteria at all aquatic application sites do not exceed a concentration 1.0 ppm (equivalent to 16.7 ppm EarthTec) of metallic copper in the treated water.

For Use in Flowing Waters

For flowing waters use a metering pump to apply a continuous dose to achieve a final dilution not to exceed 1.0 ppm as metallic copper (16.7 gallons of Earth Tec) per million gallons of water. Start with 1 to 4 gallons of EarthTec per million gallons of water (0.06 to 0.24 ppm metallic copper) and increase as necessary. A continuous maintenance dose of 0.6 to 2.0 gallons of EarthTec per million gallons water (0.036 to 0.12 ppm metallic copper) can be used to prevent further growth. Start treatment at the first sign of algae problems and stop treatment when algae no longer pose a nuisance. See **Specific Directions for Use** section for additional treatment instructions.

SPECIFIC DIRECTIONS FOR USE

TO CONTROL ALGAE, NONPUBLIC HEALTH BACTERIA AND BACTERIA THAT CAUSE TASTE AND ODOR PROBLEMS

For Use in Irrigation Reservoirs, Impounded Waters, Lakes, Ponds, Lagoons, Reservoirs, Livestock Water Systems, Swimming Areas, Farm, Industrial, Retention and Golf Course Ponds, Aquaculture Ponds, Biological Fishponds or Systems, Potable Water Supplies*, Irrigation and Chemigation Systems, Sedimentation Basins, and Ornamental Water Features or Fountains.

For fish-bearing lakes, ponds, reservoirs, irrigation canals and other listed applications, apply at the rate of 1 quart of EarthTec per 250,000 gallons of water, or 1 gallon of EarthTec per 1,000,000 gallons of water for preventive treatment of algae and nonpublic health bacteria. This will yield a concentration of 0.06 ppm metallic copper. Increase as necessary to achieve control but do not exceed a resulting copper concentration of 1.0 ppm of metallic copper in the treated water. If algae are present, treat at the rate of 3 quarts of EarthTec per 250,000 gallons of water, or 3 gallons of EarthTec per 1,000,000 gallons of water. This will yield a concentration of 0.18 ppm metallic copper.

For applications without fish or for wastewater lagoons apply at the rate of up to 1 quart of EarthTec per 15,000 gallons of water, or 1 gallon of EarthTec per 60,000 gallons of water. This will yield a rate of 1.0 ppm metallic copper.

EarthTec may be poured into the water manually after calculating the volume of water to be treated and measuring the quantity EarthTec necessary to attain a concentration of 0.06 ppm or by using an automated dispenser calibrated to release the required amount. For best results disperse EarthTec evenly throughout the body of water on a sunny day when algae are near the surface.

In situations where rapidly reproducing toxic algal species pose a public health threat to drinking or recreational water resources, applicators must receive authorization from applicable state, local or tribal water resources authorities to apply copper in excess of 44.5 gallons EarthTec (21.9 lbs. of metallic copper) per acre-foot per year (8 applications per year at up to 1 ppm).

[* Water Destined to Be Used as Drinking Water (this water must receive additional and separate potable water treatment)]

[Note to Reviewer: Bracketed language and graphics are optional]

Restrictions:

- Do not apply more than 5.5 gallons EarthTec (2.74 lbs. metallic copper) per acre-foot (1.0 ppm metallic copper) [16.7 ppm EarthTec] per application.
- When treating the whole water body, do not apply more than 44.5 gallons EarthTec (21.9 lbs. metallic copper) per acre-foot per year (8 applications per year at up to 1 ppm). This rate/frequency is calculated based on staggering the treatment of each half of the water body every 14 days (at a rate of 2.74 lbs. metallic copper per acre-foot = 1 ppm) for eight months (244 days).
- When treating sections of the water body (water management units) do not apply more than 94 gallons EarthTec (46.6 lbs. metallic copper) per acre-foot (16.7 ppm metallic copper) per year (17 applications per year at up to 1 ppm). This rate/frequency is calculated based on the maximum number of possible applications allowed based on a 14-day minimum (at a rate of 2.74 lbs. metallic copper per acre-foot = 1 ppm) retreatment interval for eight months (244 days). Do not apply more than 46.6 lbs. of metallic copper to a water management unit, regardless of the pest(s) targeted by applications.

For Use in Reservoirs, Potable Water Supplies*, Canals, Ditches, Aqueducts, and Equipment/Structures that deliver water directly to publicly owned water treatment facilities to include pipes, intake structures, gatehouses, screens, pumping stations, weirs, tanks, and penstocks

In flowing waters, make application using a metering pump to apply a continuous dose to achieve a final dilution not to exceed 5.5 gallons EarthTec (1.0 ppm metallic copper) [16.7 ppm EarthTec]. Start with 1 to 4 ppm EarthTec (0.06 to 0.24 ppm metallic copper) and increase only as necessary. A continuous maintenance dose of 0.6 to 2.0 ppm EarthTec (yielding a metallic copper concentration of 36 to 120 ppb, or micrograms per liter) can be used to prevent further growth. Start treatment at the first sign of algae problems and stop treatment when algae no longer pose a nuisance.

[*Water Destined to Be Used as Drinking Water (this water must receive additional and separate potable water treatment)]

For Use in Open Channel Irrigation Conveyance Systems and Chemigation Systems, Ditches and Canals

To prevent algae growth using a static application method, apply 1 gallon of EarthTec to 1,000,000 gallons of water to yield a rate of 0.06 ppm metallic copper in the water. If algae are present, apply 16.6 gallons of EarthTec to 1,000,000 gallons of water to yield 1.0 ppm metallic copper. To prevent algae growth using continuous flow systems, a metered flow rate of 1 milliliter per minute is added to a pumping flow of 267 gallons per minute to yield a rate of 0.06 ppm metallic copper. See **Example Calculation** table below for continuous flow rates. If algae are present, do not exceed the total dose of 1 gallon of EarthTec in 60,000 gallons of water (1.0 ppm metallic copper).

For Use in Constructed Irrigation Conveyance Systems, Laterals and Aqueducts

Apply into irrigation conveyance systems or laterals at up to a maximum rate of 1 gallon EarthTec (0.5 lbs. metallic copper) per cubic foot per second of water per 5 to 30-mile treatment depending on water hardness, alkalinity, and algae concentration. Do not apply more than 26 gallons of EarthTec (13 lbs. metallic copper) per year per 5 miles of conveyance per cubic foot per second (CFS).

[Note to Reviewer: Bracketed language and graphics are optional]

For Use in Sprinkler, Drip, or Other Types of Irrigation Equipment

To prevent growth of algae, nonpublic health bacteria, and bacteria that cause odor problems, treat at a rate of 1 gallon EarthTec per 60,000 gallons of water to 1 gallon EarthTec per 1,000,000 gallons of water. This will yield a rate of 1.0 ppm to 0.06 ppm metallic copper. Agitation is not required. Do not mix with basic substances. EarthTec must be applied continuously for the duration of the water application.

If algae are visible, start by cleaning the pipes or lines and then applying 1 gallon of EarthTec in 60,000 gallons of water (1.0 ppm metallic copper). See **Example Calculation** table below for continuous flow rates. Once the lines are cleaned, use the preventive dose described above.

EXAMPLE CALCULATION

CHEMIGATION AND IRRIGATION FLOW RATES (0.06 ppm Cu)				
Water Flow Rate gpm	Water Flow Rate cfm	Dosage Rate ppm Metallic Cu	EarthTec fl oz/min	Feeder Pump Setting EarthTec
3,000	400	0.06	0.4	11.3
6,000	800	0.06	0.8	22.6
9,000	1,200	0.06	1.1	34.0
12,000	1,600	0.06	1.5	45.3

CHEMIGATION AND IRRIGATION FLOW RATES (1.0 ppm Cu)				
Water Flow Rate gpm	Water Flow Rate cfm	Dosage Rate ppm Metallic Cu	EarthTec fl oz/min	Feeder Pump Setting EarthTec
3,000	400	1.0	6.4	188.7
6,000	800	1.0	12.8	377.5
9,000	1,200	1.0	19.1	566.2
12,000	1,600	1.0	25.6	755.0

For Use in Biological Fishponds and Aquaculture Systems

Apply 0.25 to 1.4 gallons EarthTec per acre-foot (equivalent to 0.05 to 0.25 ppm metallic copper). Monitor the copper concentration and when it falls below the desired concentration, make additional applications to bring the concentration back up to the desired concentration. EarthTec can be applied once daily for 5 to 11 consecutive days.

Restrictions:

- Do not make daily applications for more than 11 consecutive days.
- Applicators must wait at least 14 days before beginning retreatment.
- Do not apply more than 93.2 gallons EarthTec (46.6 lbs. metallic copper) per acre-foot in one year.

[Note to Reviewer: Bracketed language and graphics are optional]

For Control of Bacterial Odor in Feedlot Run-off Lagoons, Animal Waste or Confinement Pits, and Organic Sludge Pits

Apply by pouring product directly from the container into the pit or lagoon. Several application points speed up dispersal. Use 1 gallon of EarthTec (1.0 ppm metallic copper) in 60,000 gallons (8,000 cubic feet) of sewage. Bacteria and odors should be noticeably reduced in 1 to 2 weeks. Repeat application when odor reoccurs.

Feedlot Run-Off Lagoons: Add a portion of the required dosage of EarthTec at several locations around the lagoon to speed dispersal of the product. A minimum of 2 applications per year (spring and fall) is recommended. Additional applications may be required as needed when the lagoon is pumped.

Animal Waste or Confinement Pits: If pits are located under the confinement buildings, add EarthTec directly to these pits. If the pits are outside, add product to the transfer line to the pit.

Organic Sludge Pits: Apply 1 gallon EarthTec in 60,000 gallons of sludge, mixing thoroughly.

For Control of Algae and Tadpole Shrimp in Rice Fields

Apply at the first sign of algae growth on the surface of the field. Applications are most effective when made prior to algae leaving the soil surface and rising to the water surface and prior to appearance of the tadpole shrimp. Apply any time the tadpole shrimp appears from planting time until the seedlings are well rooted and have emerged through the water. Factors such as water depth, temperature, pH and the amount of algae can affect the amount of EarthTec needed to control algae and tadpole shrimp.

If the depth of water is 8 inches, apply 1 to 9 gallons of EarthTec per acre. If the depth of water is 4 inches, apply 1 to 4½ gallons of EarthTec per acre. EarthTec can be metered into the rice field as water is being applied or by aerial application.

Restrictions:

- Do not exceed 5.5 gallons EarthTec (2.74 lbs. metallic copper) per acre (1.0 ppm metallic copper) [16.7 ppm EarthTec].
- For control of tadpole shrimp, do not apply more than 27.5 gallons EarthTec (13.7 lbs. of metallic copper) per acre-foot (5 ppm metallic copper) per year. If tadpole shrimp are not present, do not apply more than 11.0 gallons EarthTec (5.48 lbs. of metallic copper) per acre-foot (2 ppm metallic copper) per year.
- In aquatic rice fields for control of tadpole shrimp and algae, do not exceed one application per field during any 24-month period. This statement applies only to crops intended for organic certification, and otherwise shall not conflict with any conventional label requirement.

For Control of Algae in Catfish Ponds

Copper can be applied throughout the spring and summer when water temps are consistently above 70°F when total alkalinity and hardness concentrations fall between 100 and 300 mg/L as CaCO₃. Applications are no longer needed in the fall after fish are harvest or the average water temps fall below 70°F. Apply mid-morning at a rate of 0.31 lbs. metallic copper per acre-foot (0.11 ppm metallic copper). Place copper crystals in a cloth bags and then put the filled bag into another cloth bag to slow the rate at which the copper dissolves. Suspend the double bagged unit of copper about 20 feet in front of a paddlewheel aerator. Run the aerator until all the copper sulfate is dissolved; this usually requires an hour or two. Use copper only if you plan to harvest fish before fall and anticipate problems with off flavoring algae.

[Note to Reviewer: Bracketed language and graphics are optional]

Restrictions:

- Do not make routine copper treatments for algae control in fingerling ponds or in broodfish ponds because off-flavors are not a problem in those fish.
- Do not use this treatment regimen in waters of low hardness and alkalinity (less than 50 ppm as CaCO₃) because copper may stress or kill fish.

For Control of Leeches, Slugs and Snails

For Use In Impounded Waters, Lakes, Ponds, Livestock Watering Systems, Reservoirs, Swimming Areas, Farm, Industrial, Retention and Golf Course Ponds, Aquaculture Ponds, Biological Fishponds or Systems, Irrigation and Chemigation Systems, Ornamental Water Features and Fountains.

Snails: When snails are present apply EarthTec at a rate of 2 ppm on day 1, equivalent to 0.12 ppm as copper. Reapply EarthTec at the rate of 1 ppm on days 3, 5 and 7. Repeat weekly as necessary to control snails.

Leeches and Slugs: For effective control, apply at the rate of 2 to 16 ppm EarthTec (i.e., 2 to 16 gallons of EarthTec per million gallons of water) to yield a rate of 0.120 to 0.96 ppm metallic copper.

Restrictions:

- Do not exceed 1.0 ppm (equivalent to 16.7 ppm EarthTec) metallic copper in any single application or in the treated water.

**FOR USE AS A MOLLUSCICIDE
Including Quagga and Zebra Mussels**

FOR USE IN OPEN WATERS

In Lakes, Ponds, Lagoons, Reservoirs, Sedimentation Basins, Canals and Ditches and Potable Water Supplies*

EarthTec may be applied in open or slow-moving, quiescent waters as a curative measure, i.e., when mollusks (veliger, juvenile or adult) have been detected. Apply near the water surface and allow to disperse, or deliver via hose and pump to the depths, sites, and surfaces of worst infestation. When applying to large areas, dispense along a route with gaps no greater than 200 feet. When fish are present, do not treat more than one-half of the lake or body of water at one a time, starting near one shore and moving outward in bands so as to allow fish to move away. When treating half of a body of water, the second half must not be treated within 14 days from the last treatment.

To control adult and juvenile mollusks, apply 2 to 16 gallons of EarthTec per million gallons of water [0.65 to 5.5 gallons EarthTec per acre-foot] to yield a rate of 0.12 to 1.0 ppm metallic copper. Do not exceed 5.5 gallons EarthTec (2.74 lbs. metallic copper) per acre foot (1.0 ppm metallic copper) [16.7 ppm EarthTec] in any single application or in the treated water. Allow at least 4 days for mortality to occur. Colder water temperatures may require longer exposures and higher labeled rates.

Maintenance Treatments: For treatments to whole water bodies, administer copper at a rate of up to 1 ppm (2.74 lbs. metallic copper per acre foot) as a maximum annual rate of 21.9 lbs. metallic copper. Monitor the copper concentration and when it falls below the desired concentration, apply additional copper to bring the concentration back up to the desired concentration. Monitor mollusk populations and terminate the additional applications once mollusks are dead or 14 days have passed since the initial

[Note to Reviewer: Bracketed language and graphics are optional]

application. Applicators must wait at least 14 days before beginning retreatment.

Effective control can also be achieved by longer exposures (e.g., 5-30 days) at lower doses (1 to 5 ppm EarthTec, to yield a rate of 0.06 to 0.30 ppm metallic copper). Repeat doses are permissible and may be required for severe infestations. When reapplying, do not exceed a resulting concentration of 1.0 ppm metallic copper in the treated water.

[*Water Destined to Be Used as Drinking Water (this water must receive additional and separate potable water treatment)]

Restrictions

- Do not apply more than 5.5 gallons EarthTec (2.74 lbs. metallic copper) per acre-foot (1.0 ppm metallic copper) [16.7 ppm EarthTec] per application.
- When treating an entire waterbody, do not apply more than 44.5 gallons EarthTec (21.9 lbs. metallic copper) per acre-foot per year (8 applications per year at up to 1 ppm). This rate/frequency is calculated based on staggering the treatment of each half of the water body every 14 days (at a rate of 2.74 lbs. metallic copper per acre-foot = 1 ppm) for eight months (244 days).
- When treating sections of a waterbody, do not apply more than 94 gallons EarthTec (46.6 lbs. metallic copper) per acre-foot (16.7 ppm metallic copper) per year (17 applications per year at up to 1 ppm). This rate/frequency is calculated based on the maximum number of possible applications allowed based on a 14-day minimum (at a rate of 2.74 lbs. metallic copper per acre-foot = 1 ppm) retreatment interval for eight months (244 days). Do not apply more than 46.6 lbs. of metallic copper to a water management unit, regardless of the pest(s) targeted by applications.

[Optional Text and Tables -

Dose Rate for Molluscicide EarthTec in Open Waters (LOW DOSES)

Acres	Depth (ft) to Treat	Acre-Ft	Million Gallons to Treat	Desired ppm, EarthTec	Desired ppm, as copper	EarthTec Dose Rate (gals)	Desired ppm, EarthTec	Desired ppm, as copper	EarthTec Dose Rate (gals)
0.1	3	0.3	0.1	1.0	0.06	0.10	2.0	0.12	0.20
0.5	3	1.5	0.5	1.0	0.06	0.50	2.0	0.12	1
1	3	3.0	1.0	1.0	0.06	1	2.0	0.12	2
1	6	6.0	2.0	1.0	0.06	2	2.0	0.12	4
10	3	30	10	1.0	0.06	10	2.0	0.12	20
10	4.5	45	15	1.0	0.06	15	2.0	0.12	30
10	6	60	20	1.0	0.06	20	2.0	0.12	40
20	3	60	20	1.0	0.06	20	2.0	0.12	40
100	3	300	100	1.0	0.06	100	2.0	0.12	200
1000	3	3,000	1,000	1.0	0.06	1,000	2.0	0.12	2,000

[Note to Reviewer: Bracketed language and graphics are optional]

Dose Rate for Molluscicide EarthTec in Open Waters (MEDIUM DOSES)

Acres	Depth (ft) to Treat	Acre-Ft	Million Gallons to Treat	Desired ppm, EarthTec	Desired ppm, as copper	EarthTec Dose Rate (gals)	Desired ppm, EarthTec	Desired ppm, as copper	EarthTec Dose Rate (gals)
0.1	3	0.3	0.1	4.0	0.240	0.40	10.0	0.600	1.00
0.5	3	1.5	0.5	4.0	0.240	2.00	10.0	0.600	5
1	3	3.0	1.0	4.0	0.240	4	10.0	0.600	10
1	6	6.0	2.0	4.0	0.240	8	10.0	0.600	20
10	3	30	10	4.0	0.240	40	10.0	0.600	100
10	4.5	45	15	4.0	0.240	60	10.0	0.600	150
10	6	60	20	4.0	0.240	80	10.0	0.600	200
20	3	60	20	4.0	0.240	80	10.0	0.600	200
100	3	300	100	4.0	0.240	400	10.0	0.600	1,000
1000	3	3,000	1,000	4.0	0.240	4,000	10.0	0.600	10,000

Dose Rate for Molluscicide EarthTec in Open Waters (MAXIMUM DOSE)

Acres	Depth (ft) to Treat	Acre-Ft	Million Gallons to Treat	Desired ppm, EarthTec	Desired ppm, as copper	EarthTec Dose Rate (gals)
0.1	3	0.3	0.1	16.7	1.0	1.7
0.5	3	1.5	0.5	16.7	1.0	8.4
1	3	3.0	1.0	16.7	1.0	16.7
1	6	6.0	2.0	16.7	1.0	33.5
10	3	30	10	16.7	1.0	167
10	4.5	45	15	16.7	1.0	251
10	6	60	20	16.7	1.0	335
20	3	60	20	16.7	1.0	335
100	3	300	100	16.7	1.0	1,673
1000	3	3,000	1,000	16.7	1.0	16,733

[Optional text:

When calculating dose rates for a given volume of water, achieve a desired concentration of metallic copper in the water to be treated by using the following formula:

$$\frac{\text{Gallons of EarthTec Applied}}{\text{Million Gallons to be Treated}} \times 0.06 = \text{Parts per million copper in the treated water}$$

For example, treating 3 million gallons with 4.5 gallons of EarthTec (a rate of 1.5 ppm as EarthTec) will yield a final copper dose of:

$$(4.5 \text{ gals} / 3 \text{ million gallons}) \times 0.06 = 0.09 \text{ ppm as copper}$$

Always use volumetric measurement devices that are calibrated in accordance with manufacturer specifications.

[Note to Reviewer: Bracketed language and graphics are optional]

To calculate water volume and flow rates:

- *Volume of Water - multiply the average depth by surface area.*
- *Gallons of Water - multiply the Volume in cubic feet times 7.5.*

1 cubic foot per second of flow = 27,000 gallons/hour

1 acre foot = 326,000 gallons

1 million gal = 3.07 acre-feet

1 hectare = 2.47 acres

1 meter = 3.28 feet

1 ppm (1 part per million) =1 mg/L and/or 1 gal per million gallons

1 gal = 3.785 mL]

FOR USE IN FLOWING WATERS

In Potable Water Supplies*, Canals, Ditches, Aqueducts, and equipment/structures (to include pipes, intake structures, gatehouses, screens, pumping stations, weirs, tanks, and penstocks that deliver treated water directly to publicly owned-water treatment facilities.

Apply EarthTec in flowing waters when mollusks (veliger, juvenile, or adult) have been detected. EarthTec may be used as a curative measure when adult or juvenile mollusks are present, or as a preventative measure (to inhibit colonization) when adults and/or planktonic larval mollusks have been detected. EarthTec may be used continuously on flowing waters as a means of preventing further spread and colonization of mollusks. Start the continuous application of Earth Tec when mollusks are detected and end application when mollusks are no longer present.

For flowing waters use a metering pump to apply a continuous dose to achieve a final dilution not to exceed 1.0 ppm as metallic copper (16.7 gallons of Earth Tec) per million gallons of water. Start with 1 to 4 gallons of EarthTec per million gallons of water (0.06 to 0.24 ppm metallic copper) and increase as necessary. Start treatment at the first sign of algae problems and stop treatment when algae no longer pose a nuisance.

If adult mollusks are already present, allow at least 4 days for mortality to occur, or longer for well-established populations where adults appear in clumps. For most situations satisfactory control will be obtained at a continuous dose of 1 to 5 ppm EarthTec (i.e., 0.06 to 0.30 ppm metallic copper). Colder water temperatures may require longer exposure and higher labeled rates. Once the initial infestation has been cleared from surfaces, a continuous maintenance dose of 0.6 to 2.0 ppm EarthTec (0.036 to 0.12 ppm metallic copper) can be used to prevent further colonization.

[* Water Destined to Be Used as Drinking Water (this water must receive additional and separate potable water treatment)]

Restrictions:

- Do not exceed 5.5 gallons Earth Tec (2.74 lbs. metallic copper) in the flowing water (1.0 ppm metallic copper) [16.7 ppm EarthTec].

[Note to Reviewer: Bracketed language and graphics are optional]

[Optional Text and Tables -

Example Dose Rates for EarthTec in Flowing Waters (LOW DOSE)

cfs	gal/min	MGD	EarthTec				EarthTec			
			Desired ppm, EarthTec	Desired ppm, as copper	Feed Rate (fluid oz/min)	EarthTec Feed Rate (ml/min)	Desired ppm, EarthTec	Desired ppm, as copper	Feed Rate (fluid oz/min)	EarthTec Feed Rate (ml/min)
1	449	0.65	1.0	0.06	0.06	1.70	2.0	0.12	0.11	3.40
1.55	696	1.0	1.0	0.06	0.09	2.63	2.0	0.12	0.18	5.27
3	1,346	1.9	1.0	0.06	0.17	5.10	2.0	0.12	0.34	10.2
4	1,795	2.6	1.0	0.06	0.23	6.80	2.0	0.12	0.46	13.6
5	2,244	3.2	1.0	0.06	0.29	8.49	2.0	0.12	0.57	17.0
10	4,488	6.5	1.0	0.06	0.57	17.0	2.0	0.12	1.15	34.0
15.47	6,943	10	1.0	0.06	0.89	26.3	2.0	0.12	1.78	52.6
50	22,442	32	1.0	0.06	2.87	84.9	2.0	0.12	5.74	170
100	44,883	65	1.0	0.06	5.74	169.9	2.0	0.12	11.5	340
155	69,429	100	1.0	0.06	8.89	262.8	2.0	0.12	17.8	526
1,000	448,830	646	1.0	0.06	57	1,699	2.0	0.12	115	3,398

Example Dose Rates for EarthTec in Flowing Waters (MEDIUM AND HIGH DOSES)

cfs	gal/min	MGD	EarthTec				EarthTec			
			Desired ppm, EarthTec	Desired ppm, as copper	Feed Rate (fluid oz/min)	EarthTec Feed Rate (ml/min)	Desired ppm, EarthTec	Desired ppm, as copper	Feed Rate (fluid oz/min)	EarthTec Feed Rate (ml/min)
1	449	0.65	5.0	0.30	0.29	8.49	16.0	0.96	0.92	27.2
1.55	696	1.0	5.0	0.30	0.45	13.2	16.0	0.96	1.42	42.1
3	1,346	1.9	5.0	0.30	0.86	25.5	16.0	0.96	2.76	81.5
4	1,795	2.6	5.0	0.30	1.15	34.0	16.0	0.96	3.68	109
5	2,244	3.2	5.0	0.30	1.44	42.5	16.0	0.96	4.60	136
10	4,488	6.5	5.0	0.30	2.87	84.9	16.0	0.96	9.19	272
15.47	6,943	10	5.0	0.30	4.44	131	16.0	0.96	14.2	420
50	22,442	32	5.0	0.30	14.4	425	16.0	0.96	46.0	1,359
100	44,883	65	5.0	0.30	28.7	849	16.0	0.96	91.9	2,718
155	69,429	100	5.0	0.30	44.4	1,314	16.0	0.96	142	4,205
1,000	448,830	646	5.0	0.30	287	8,494	16.0	0.96	919	27,180

MGD = Million Gallons per Day cfs = Cubic Feet per Second]

[Note to Reviewer: Bracketed language and graphics are optional]

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

PESTICIDE STORAGE: Store in a safe place away from pets and keep out of the reach of children. Store away from excessive heat. Always store above 32 degrees F. Do Not Freeze. Freezing may cause product separation. Always keep container closed. Keep away from galvanized pipe, and any nylon storage or handling equipment.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess mixture or rinsate is a violation of federal law. If these wastes cannot be disposed of by use according to label instructions, contact your state pesticide or environmental control agency, or the hazardous waste representative at the nearest EPA regional office for guidance. In the event of spill, neutralize with limestone or baking soda before disposal. May deteriorate concrete.

CONTAINER HANDLING:

Nonrefillable containers with capacities less than or equal to 5 gallons: Nonrefillable container. Do not reuse or refill this container. Triple rinse container (or equivalent) promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container $\frac{1}{4}$ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure 2 more times. Offer for recycling if available. If recycling is not available, puncture and dispose of in a sanitary landfill, or by incineration.

Nonrefillable containers with capacities greater than 5 gallons: Nonrefillable container. Do not reuse or refill this container. Offer for recycling, if available. Triple rinse container (or equivalent) promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank. Fill the container $\frac{1}{4}$ full with water. Replace and tighten closures. Tip container on its side and roll it back and forth, ensuring at least 1 complete revolution, for 30 seconds. Stand the container on its end and tip it back and forth several times. Turn the container over onto its other end and tip it back and forth several times. Empty the rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Repeat this procedure 2 more times. Offer for recycling if available. If recycling is not available, puncture and dispose of in a sanitary landfill, or by incineration.

Pressure rinse as follows: Empty the remaining contents into application equipment or a mix tank and continue to drain for 10 seconds after the flow begins to drip. Hold container upside down over application equipment or mix tank or collect rinsate for later use for disposal. Insert pressure rinsing nozzle in the side of the container, and rinse at about 40 PSI for at least 30 seconds. Drain for 10 seconds after the flow begins to drip.

Refillable Containers: Refill this container with pesticide only. Do not reuse this container for any other purpose. Cleaning the container before final disposal is the responsibility of the person disposing of the container. Cleaning before refilling is the responsibility of the refiller. To clean the container before final disposal, empty the remaining contents from this container into application equipment or mix tank. Fill the container about 10% full with water. Agitate vigorously or recirculate water with the pump for 2 minutes. Pour or pump rinsate into application equipment or rinsate collection system. Repeat this rinsing procedure 2 more times. Offer for recycling if available. If recycling is not available, puncture and dispose of in a sanitary landfill, or by incineration.

Tanker trucks: Emptied container retains vapor and product residue. Observe all precautions stated on this label until the container is cleaned, reconditioned, or destroyed. Prior to refilling, inspect carefully for damage such as cracks, punctures, abrasions, and worn-out threads and closures. Clean thoroughly before reuse for transportation of a material of different composition or before retiring this transport vehicle from service

[Note to Reviewer: Bracketed language and graphics are optional]

IMPORTANT READ BEFORE USING
LIMITED WARRANTY AND LIMITATION OF REMEDIES

Read the entire Directions for Use, Limited Warranty and Limitation of Remedies (including limitations on liability) before using this product. If terms are not acceptable, return the unopened product container at once. By using this product, user or buyer accepts the following conditions, disclaimer of warranties and limitations of liability.

The Directions for Use of this product are believed to be adequate and must be followed carefully. However, it is impossible to eliminate all risks associated with the use of this product. Crop injury, ineffectiveness or other unintended consequences may result because of such factors as weather conditions, presence of other materials, or the manner of use or application, all of which are beyond the control of Earth Science Laboratories, Inc. To the extent consistent with applicable law, all such risks shall be assumed by the user or buyer.

To the extent consistent with applicable law, seller warrants that the product conforms to the chemical description and is reasonably fit for the purpose stated on the label for use under normal conditions, but makes no other warranties of FITNESS OR MERCHANTABILITY expressed or implied, or any other warranty if the product is used contrary to the label instructions, or under conditions not foreseeable to the seller. To the extent consistent with applicable law, the seller shall not be liable for more than the cost of this product to the buyer and will in no event be liable for any consequential, special, or indirect damages connected with the use or handling of this product. This product is offered and the buyer or user accepts it subject to the foregoing terms which may not be varied. Seller makes no warranty for product which has been frozen.



Certified to
NSF/ANSI 60